Quick setup sheet for the TL-358/2

K5940069-00

1 Mounting

1. The TL-358/2 can be mounted on a rack with 4 (M6) capitve hexagon slotted head bolts (key width 8, screwing torque = max. 9 Nm)

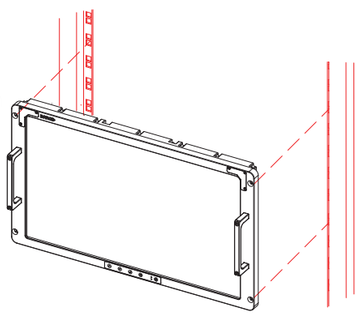

2. The TL-358/2 has the following possible IAW VESA standard mounting solution: 200mm x 100mm (M6), maximum screwdepth in the unit is 9mm.

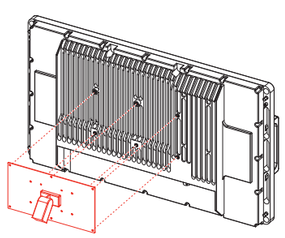

Screws are not included in the standard Barco offering.

VESA mounting will limit the environmental performance!

2 Connecting the power

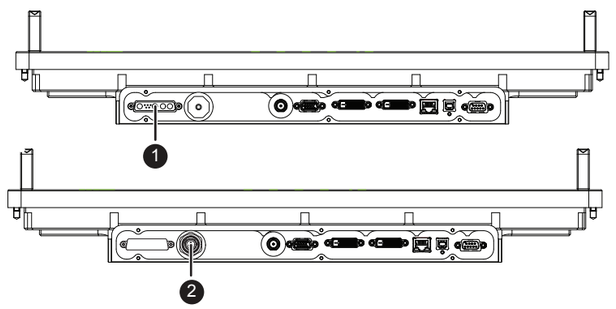

1. **DC** power: Connect the power cable to the DC power connector of the unit and tighten the locking screws. See user manual for connector pinning or use the ordered power cord.

2. **AC** power: Connect the power cable to the Ac power connector of the unit. See user manual for connector pinning or use the ordered power cord.

Power on the power supply

3 Connecting the signals

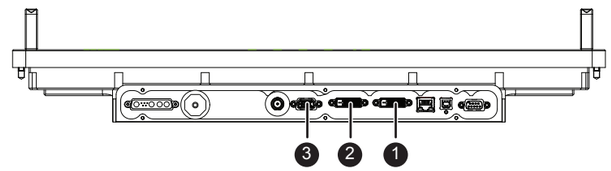

1	DVI1 input connector
2	DVI2 input connector
3	Analog input connector

1, 2 **Digital input:** Connect (a) digital device(s) to the DVI connector(s) (DVI1, DVI2).

3 **Analog input**: Connect an analog device to the analog input connector.

See user manual for connector pinnings.

4 Control panel

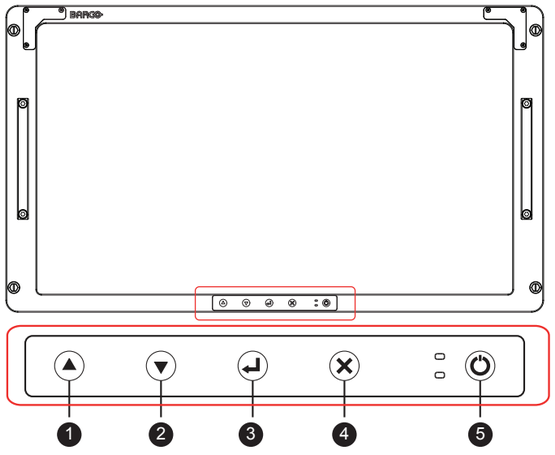

1	Up button
2	Down button
3	Select button
4	Exit button
5	Standby button

5 Brightness

1. To adjust the brightness, push the up or down button. When no OSD menus are visible, the brightness bar appears on the screen.



2. Brightness can be adjusted from 0 (black screen) to 100.

6 Input selection

Automatic input selection: the first valid signal detected by the display will automatically be selected and displayed.

Manual input selection: manual input selection can be done via the "Input" menu, accesible via the OSD main menu.

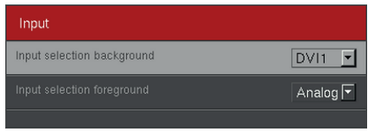

7 Using the OSD menu structure

1. Press the Select button.
As a result, the OSD main menu comes up:

2. Use the Up/Down buttons to move to the desired submenu.

3. To go into a submenu use the Select button.

4. Use the Up/Down buttons to change values or make selections.

5. To confirm adjustments and selections, use the Select button.

BARCO
Visibly yours
WWW.BARCO.COM